

# koikas acoustics PTY LTD

CONSULTANTS IN NOISE & VIBRATION

Commercial 1 (Unit 27)

+612 9587 9702

*DELIVERING SOUND ADVICE*

637-645 Forest Road

office@koikasacoustics.com

Bexley NSW 2207

www.koikasacoustics.com

ABN: 12 058 524 771

---

## CERTIFICATE OF PERFORMANCE

### IMPACT SOUND INSULATION

### KENBROCK PTY LTD

**Issue Date:** Monday, 4 April 2022

**Our File Reference:** 3739C20220404ImGerflor\_Kenbrock

## DOCUMENT CONTROL

---

**Project Title** Certificate of Performance  
Impact Sound Insulation  
Kenbrock Pty Ltd

---

**Project Number** 3739

---

**Document Reference** 3739C20220404ImGerflor\_Kenbrock

---

**Document Path** G:\Shared drives\KA Acoustics 2022\REPORT\Partition Testing Impact\3739  
Gerflor\3739C20220404ImGerflor\_Kenbrock.docx

---

| Version | Date       | Author | Review | Notes                                |
|---------|------------|--------|--------|--------------------------------------|
| V1      | 04/04/2022 | LM     | NK     | Report version 1 available for issue |

---

---

---

---

---

---

---

---

---

---

---

**Prepared by** Nick Koikas  
M.A.A.S.  
Director

---

**Client** Kenbrock Pty Ltd  
Attention: Steve Gradecak  
E-mail: [SGradecak@gerflor.com.au](mailto:SGradecak@gerflor.com.au)

---

*The information contained herein should not be reproduced except in full. The information provided in this report relates to acoustic matters only. Supplementary advice should be sought for other matters relating to construction, design, structural, fire-rating, waterproofing, and the likes.*



# CERTIFICATE OF PERFORMANCE

## IMPACT SOUND INSULATION

### KENBROCK PTY LTD

## CONTENTS

|            |   |           |
|------------|---|-----------|
| <b>1.0</b> | <b>CONSULTANT'S BRIEF .....</b>                 | <b>4</b>  |
| <b>2.0</b> | <b>IMPACT NOISE COMPLIANCE TESTING .....</b>    | <b>5</b>  |
| 2.1        | PARTITION SYSTEM.....                           | 5         |
| 2.2        | ASSESSMENT PROCEDURES & MEASUREMENTS .....      | 5         |
| 2.3        | AMBIENT BACKGROUND NOISE MEASUREMENT .....      | 6         |
| 2.4        | REVERBERATION TIME MEASUREMENTS .....           | 6         |
| 2.5        | INSTRUMENTATION AND CALIBRATION .....           | 6         |
| <b>3.0</b> | <b>IMPACT NOISE REQUIREMENTS .....</b>          | <b>7</b>  |
| 3.1        | BCA REQUIREMENT .....                           | 7         |
| 3.2        | AAAC STAR RATING PERFORMANCE REQUIREMENTS ..... | 7         |
| <b>4.0</b> | <b>MEASURED RESULTS.....</b>                    | <b>8</b>  |
| <b>5.0</b> | <b>CONCLUSION .....</b>                         | <b>11</b> |

## TABLE OF APPENDICES

---

|             |  |
|-------------|--|
| Appendix A: | Calculations and Graphs for Impact Noise Testing |
|-------------|--|

---



## 1.0 CONSULTANT'S BRIEF

Koikas Acoustics was requested by Kenbrock Pty Ltd to conduct impact noise tests of the:

- **5 mm Kenbrock Artloc, and**
- **7.5 mm Kenbrock Aquasmart+**

floor systems.

A total of two (2) tests were conducted which included the base ceiling/floor system with reinforced concrete slab and suspended ceiling.

The purpose of undertaking these impact noise tests was to quantify the acoustic performance of the flooring systems.

Test results were compared to the acoustic requirements of *Part F5 of BCA (Building Codes of Australia)* and the standards prescribed by the *Association of Australasian Acoustical Consultants (AAAC)*.

All measurements were carried out as per the guidelines and procedures outlined in:

- *AS/NZS ISO 140.7:2006 “Field measurements of impact sound insulation of floors”* and the rating determined, and as per
- *AS ISO 717.2-2004 “Rating of sound insulation in buildings and of building elements”*.



## 2.0 IMPACT NOISE COMPLIANCE TESTING

### 2.1 PARTITION SYSTEM

Koikas Acoustics has been advised that the ceiling/floor system between the residential units is constructed with the following building materials:

- Approximately 200 mm thick concrete slab;
- 80~150 mm deep suspended ceiling cavity, and
- 13 mm thick standard plasterboard ceiling.

Hereafter referred to as the “*existing ceiling/floor system*” (ECFS).

The tests were conducted with the following floor covering in conjunction with the selected flooring over the ECFS:

- Test 00: Bare concrete floor (ECFS only) – *for comparison purposes only*
- Test 01: 5 mm Kenbrock Artloc
- Test 02: 7.5 mm Kenbrock Aquasmart+

### 2.2 ASSESSMENT PROCEDURES & MEASUREMENTS

The impact noise tests were taken within residential flat units in Sydney, NSW on Tuesday, 29<sup>th</sup> March 2022.

Spectrum sound level measurements of transmitted impact noise were recorded in 1/3 octave band centre frequencies between 50 and 10,000 Hertz.

A standardised BSWA Technology Co. Type TM002 S/N 440504 Tapping Machine was used to generate the sound field in the source rooms for the impact noise test. Impact noise measurements were carried out per the recommendations of *AS/NZS ISO 140.7:2006 “Field measurements of impact sound insulation of floors”*. This document provides information on appropriate measurement equipment and the proper implementation of measurement practices to achieve reliable results of impact sound insulation between rooms in buildings.



For determining a single number quantity for impact sound insulation between rooms in buildings when measurements are conducted “in-situ”,  $L'_{nT,w}$  (weighted standardised impact sound pressure level), the relevant standard is *AS/NZS ISO 717.2-2004 “Impact sound insulation”*. The calculated  $L'_{nT,w}$  derived from applying the formulae in this standard allows for a comparison between these calculated levels and the nominated acceptable levels outlined in the *Verification Methods* of the *Building Code of Australia (BCA)*.

### **2.3 AMBIENT BACKGROUND NOISE MEASUREMENT**

A measure of the underlying ambient noise was taken in the receiving rooms to account for the perceived noise in the space. Inaccuracies in the measurements and calculations can occur in areas of high ambient noise however the location of the site and receiver rooms meant little ambient noise was evident in this case. Ambient noise levels in each 1/3 octave frequency band were measured to take into account the effect of ambient noise during the recording of the transmitted impact noise levels.

### **2.4 REVERBERATION TIME MEASUREMENTS**

To determine the  $L_{nT,w}$  reverberation time measurements need to be performed in the receiving rooms. The reverberation time in the receiver room is calculated to ‘standardise’ the airborne/impact noise transmission measurements to reference reverberation time of 0.5 seconds as required by AS/NZS ISO 140.7:2006 Section 3.4.

Reverberation time measurements were conducted using the impulse-source method. This consisted of averaging the sound level decay time associated with several large balloon bursts within the receiver room. This transient response was analysed by the sound level meter and a measure of the reverberation time in 1/3 octave bands was used to calculate the standardised impact noise rating.

### **2.5 INSTRUMENTATION AND CALIBRATION**

NTi XL2 precision spectrum analyser S/N A2A-19160-E0 was used for all measurements (impact noise, ambient noise, reverberation). The equipment used for taking noise level measurements is traceable to NATA certification. Field calibrations were taken before and after the impact noise measurements with a NATA calibrated pistonphone. No system drifts were observed.



### 3.0 IMPACT NOISE REQUIREMENTS

#### 3.1 BCA REQUIREMENT

For verification of the impact noise rating for floors, Part FV5.1 (b) of the latest update of the Building Code of Australia (BCA) 2019 states:

*Impact: a weighted standardised impact sound pressure level ( $L_{nT,w}$ ) not more than 62 when determine under AS ISO 717.2*

#### 3.2 AAAC STAR RATING PERFORMANCE REQUIREMENTS

Reproduced from the Association of Australasian Acoustical Consultants (AAAC) Guideline for Apartment and Townhouse Acoustic Ratings, the following Table (Section C) describes the acoustic ratings regarding the Star Rating System.

| Table 1. Star Rating requirements for Inter-tenancy Activities – Published by the AAAC |        |        |        |        |        |
|--|--------|--------|--------|--------|--------|
| INTER-TENANCY ACTIVITIES   | 2 Star | 3 Star | 4 Star | 5 Star | 6 Star |
| <b>(c) Impact isolation of floors</b>  |        |        |        |        |        |
| - Between tenancies $L_{nT,w} \leq$  | 65     | 55     | 50     | 45     | 40     |
| - Between all other spaces & tenancies $L_{nT,w} \leq$                                 | 65     | 55     | 50     | 45     | 40     |

Note, Koikas Acoustics is of the understanding that the impact noise ratings in Table 1 infer  $L'_{nT,w}$  and not  $L_{nT,w}$ .  $L_{nT,w}$  is an impact noise rating derived from tests undertaken in a laboratory and  $L'_{nT,w}$  is derived from field tests.



## 4.0 MEASURED RESULTS

The results of the impact noise tests are summarised in Table 2 below.

| <b>Table 2. Impact noise insulation performance summary for tested ceiling/floor Systems</b> |                                      |                           |                         |
|--|--------------------------------------|---------------------------|-------------------------|
| <b>System Tested<sup>1</sup></b>   | <b>L'<sub>nT,w</sub><sup>3</sup></b> | <b>FIIC<sup>4,5</sup></b> | <b>AAAC<sup>6</sup></b> |
| Test 00: Bare concrete floor (ECFS only) – <i>for comparison purposes only</i>               | 60                                   | 44                        | 2                       |
| Test 01: 5 mm Kenbrock Artlock   | 47                                   | 59                        | 4                       |
| Test 02: 7.5 mm Kenbrock Aquasmart+  | 47                                   | 60                        | 4                       |

Detailed calculations of the partition system's impact noise insulation on the ceiling/floor systems are attached as **Appendix A**.

The following are also noted:

1. All tests were undertaken with the existing ceiling/floor system consisting of between 200 mm thick concrete sub-base with approximately 80~150 mm suspended ceiling cavity and one layer of 13 mm thick plasterboard ceiling.
2. The tested flooring systems as listed in Table 2 (Test 01) have met both the BCA 2019 minimum requirement ( $L_{nT,w} \leq 62$ ) and the AAAC Star rating of 5 for impact noise insulation.
3. The lower the  $L'_{nT,w}$  rating the better the impact insulation.
4. The relation between Field Impact Insulation Class (FIIC) and Impact Insulation Class (IIC) can be described by the formula  $FIIC + 5 \approx IIC$ .
5. The higher the IIC and FIIC the better the impact insulation.
6. The higher the AAAC Star Rating the better the impact insulation.
7. The information contained herein should not be reproduced except in full.





8. The information provided in this report relates to acoustic matters only. Supplementary advice should be sought for other matters relating to flooring installation, construction, design, structural, fire-rating, waterproofing, and the likes.
9. Product installation details and methodologies must be sought from the product supplier, installer, or other experts. Koikas Acoustics is not liable for any product defects.
10. The acoustic ratings provided in this report are indicative of a 1 m<sup>2</sup> sample and should be used for comparative purposes only. Acoustic ratings will vary depending on the testing environment/conditions including, materials/structures of the existing ceiling/floor system, room volume, internal layout, and workmanship. Even with the same testing environment, acoustic ratings can vary from room to room and between buildings as no two buildings are identical. A fully laid flooring system typically presents a lower acoustical rating, i.e. up to 3 rating points less. For example, where the flooring is system is quantified with a 1 m<sup>2</sup> sample as being L'<sub>nTw</sub> 45 when the same flooring is laid from wall to wall, the acoustical rating could reduce up to L'<sub>nTw</sub> 48.
11. Floor covering must not make contact with any walls or joineries (kitchen benches, cupboards etc). During the installation of any hard floor coverings, temporary spaces of 5~10mm should be used to isolate the floor covering from walls and/or joineries and the resulting gaps should be filled with a suitable mastic type sealant or off-cut of underlay or the equivalent where available. The acoustic integrity could be degraded if the above precautions and treatments are not implemented. Refer to Figures 1 and 2 below for details of the proper installation of flooring materials.



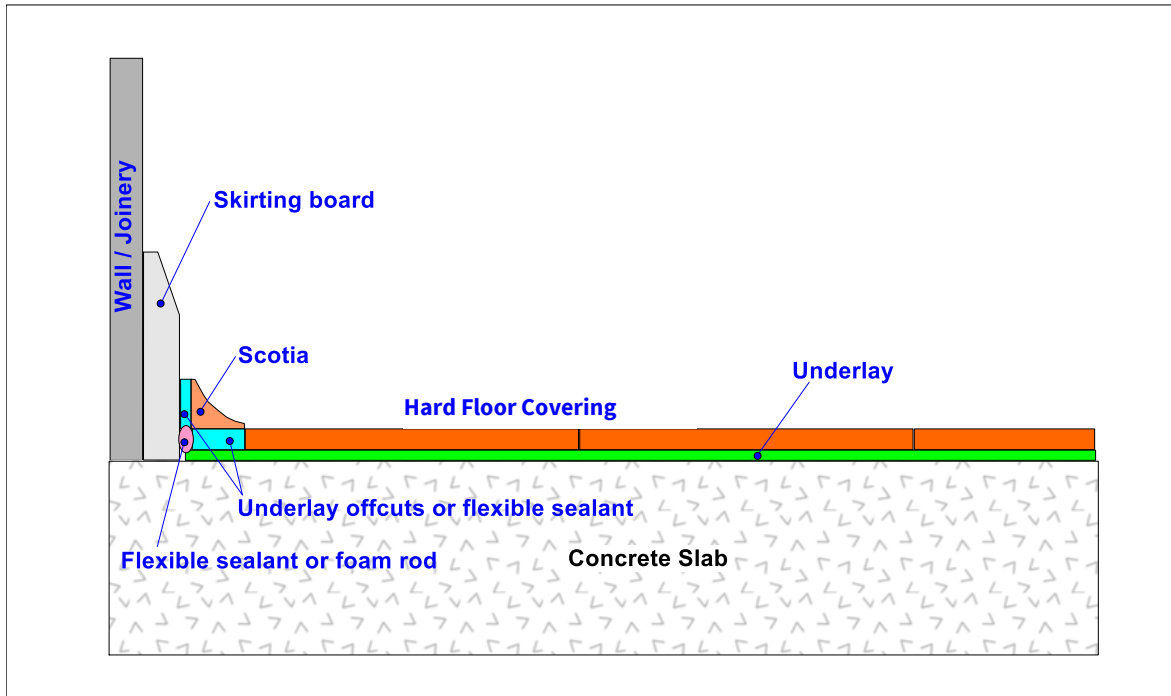


Figure 1. Wall / Joinery details (skirting board & scotia)

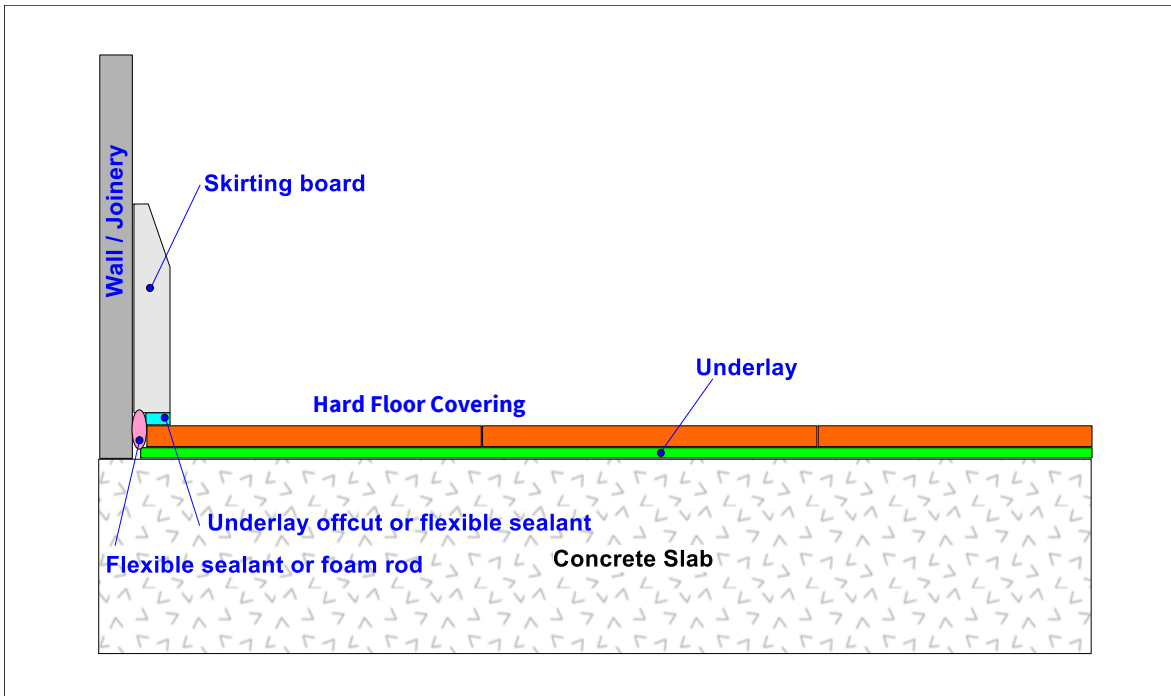


Figure 2. Wall / Joinery details (skirting board)

## 5.0 CONCLUSION

Koikas Acoustics was requested by Kenbrock Pty Ltd to undertake impact noise tests of the **5 mm Kenbrock Artloc and 7.5 mm Kenbrock Aquasmart+** flooring systems. The acoustic performances were calculated and compared against the acoustic requirements of the current BCA and AAAC Star Ratings that are commonly used in Australia.

The calculated acoustic rating of the tested flooring system is summarised and presented in **Table 2** of this report. A detailed test certificate is provided in **Appendix A**.

The acoustic ratings provided in this report are indicative and for comparative purposes only. Acoustic ratings will vary depending on the testing environment/conditions including, materials/structures of the existing ceiling/floor system, room volume, internal layout, and workmanship. Even with the same testing environment/conditions, acoustic ratings would still vary from building to building.

It is recommended that in-situ testing be conducted before any full fit-out as the sub-base ceiling/floor system and the wall junctions could impact the noise transfer to the unit below.

This report should be reproduced in full including the attached Appendix.

Floor covering must not make contact with any walls or joineries (kitchen benches, cupboards, etc). During the installation of any hard floor coverings, temporary spaces of 5~10 mm should be used to isolate the floor covering from walls and/or joineries and the resulting gaps should be filled with a suitable mastic type sealant or off-cut of underlay or the equivalent where available. The acoustic integrity could be degraded if the above precautions and treatments are not implemented.



**APPENDIX A**

**A  
P  
P  
E  
N  
D  
I  
X  
A**

**APPENDIX A**

# FIELD MEASUREMENTS OF IMPACT SOUND INSULATION OF FLOORS

Date of Test : Tuesday, 29 March 2022  
 Project No. : 3739  
 Testing Company : Koikas Acoustics  
 Checked by : Nick Koikas  
 Place of Test : Residential apartments in Belfield, NSW  
 Client : Gerflor  
 Client Address : -


| Description of Floor System                        | Name               | Thickness (mm) | Density (SI) |
|--|--------------------|----------------|--------------|
| Kenbrock Aquasmart Concrete slab Suspended ceiling | Kenbrock Aquasmart | 6.5            | --           |
|  | Concrete slab      | 180-200        | --           |
|  | Suspended ceiling  | 80-150         | --           |
|  | 0                  | --             | --           |

Room Dimensions  
 Width : 5 m  
 Length : 8 m  
 Area : 40.00 m<sup>2</sup>

Sample Dimensions  
 Width : 1 m  
 Length : 1 m  
 Area : 1 m<sup>2</sup>

| Receiver Rm                 | Location | Width | Length | Area  | Height | Volume | Room Surfaces |        |              |
|-----------------------------|----------|-------|--------|-------|--------|--------|---------------|--------|--------------|
|                             |          |       |        |       |        |        | Walls         | Floor  | Ceiling      |
| en/Dining/Living directly t |          | 5     | 8      | 40.00 | 2.7    | 108.00 | Plasterboard  | Timber | Plasterboard |


| Frequency f Hz | L'nT (one-third octave) dB |                |                         |
|----------------|----------------------------|----------------|-------------------------|
|                | Sub Base                   | Sub Base Floor | Sub Base Floor Underlay |
| 50             | 46.6                       | N/A            | 53.6                    |
| 63             | 51.0                       | N/A            | 55.5                    |
| 80             | 55.5                       | N/A            | 52.8                    |
| 100            | 55.9                       | N/A            | 55.6                    |
| 125            | 58.9                       | N/A            | 59.9                    |
| 160            | 60.3                       | N/A            | 59.4                    |
| 200            | 51.7                       | N/A            | 49.9                    |
| 250            | 50.5                       | N/A            | 46.6                    |
| 315            | 50.7                       | N/A            | 47.4                    |
| 400            | 51.6                       | N/A            | 43.2                    |
| 500            | 48.4                       | N/A            | 38.9                    |
| 630            | 46.9                       | N/A            | 24.9                    |
| 800            | 48.3                       | N/A            | 28.1                    |
| 1000           | 49.3                       | N/A            | 27.3                    |
| 1250           | 49.2                       | N/A            | 21.9                    |
| 1600           | 50.6                       | N/A            | 15.0                    |
| 2000           | 52.9                       | N/A            | 11.0                    |
| 2500           | 54.9                       | N/A            | 10.0                    |
| 3150           | 55.7                       | N/A            | 6.1                     |
| 4000           | 52.6                       | N/A            | -2.4                    |
| 5000           | 49.9                       | N/A            | -7.4                    |

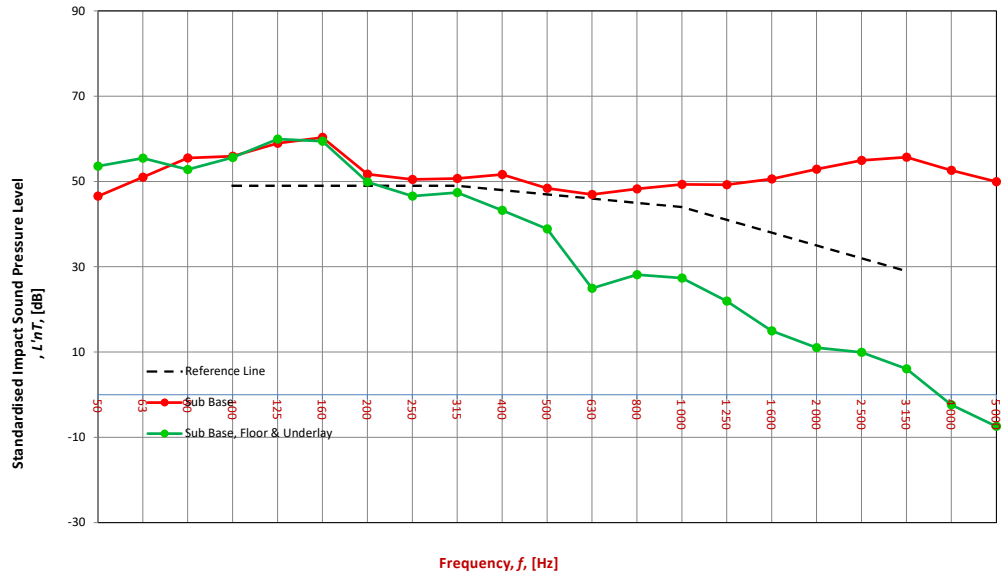

| Sub Base    |        |
|-------------|--------|
| L'nT,w      | 60     |
| Ci          | -9     |
| Ci(50-2500) | -9     |
| Ci(63-2000) | -9     |
| AAAC★       | 2 Star |
| FIC         | 44     |

| Sub Base & Floor |     |
|------------------|-----|
| L'nT,w           | N/A |
| Ci               | N/A |
| Ci(50-2500)      | N/A |
| Ci(63-2000)      | N/A |
| AAAC★            | N/A |
| FIC              | N/A |

| Sub Base, Floor & Underlay |        |
|----------------------------|--------|
| L'nT,w                     | 47     |
| Ci                         | 2      |
| Ci(50-2500)                | 3      |
| Ci(63-2000)                | 3      |
| AAAC★                      | 4 Star |
| FIC                        | 60     |

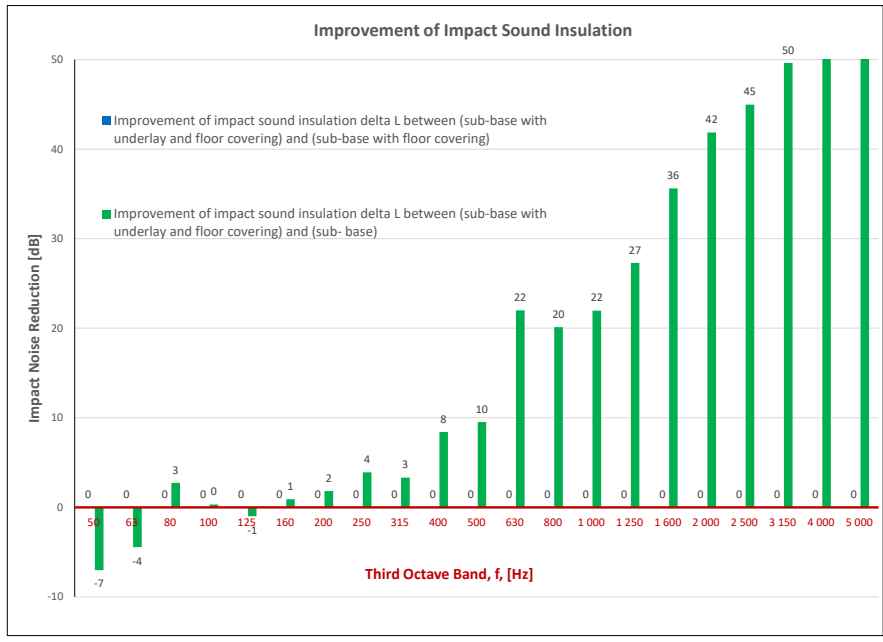

### Definitions of Noise Metrics

**FIC:**  
Field Impact Insulation Class is a single-number rating of how well a floor system attenuates impact type sounds, such as footsteps. Calculated from third-octave band normalised impact sound pressure level data and referenced to 10 m<sup>2</sup> as described in ASTM E989. The higher the single-number rating, the better its impact insulation performance.

**L'nT,w:**  
The Weighted Standardised Impact Sound Pressure Level when measured in situ referenced to a reverberation time (RT60) of 0.5 seconds. Used by the AAAC to determine their respective Star Rating.

**Ci:**  
Spectrum adaption term is a low frequency correction factor. Typically for massive floors such as concrete, the values are about zero while for timber joist floors Ci is positive because of the low resonant frequencies. Considers frequency range between 100 -and 2500 Hz.

**Ci(50-2500):**  
Same as above, but for the frequency range 50 -2500 Hz.

**Ci(125-2000):**  
Same as above, but for the frequency range 125 -2000 Hz.

| AAAC Star R. | 2            | 3               | 4       | 5                | 6                  |
|--------------|--------------|-----------------|---------|------------------|--------------------|
| L'nT,w       | 65           | 55              | 50      | 45               | 40                 |
| FIC          | 45           | 55              | 60      | 65               | 70                 |
| Comments     | Below BCA 62 | Clearly Audible | Audible | Barely Inaudible | Normally Inaudible |

# FIELD MEASUREMENTS OF IMPACT SOUND INSULATION OF FLOORS

Date of Test : Tuesday, 29 March 2022  
 Project No. : 3739  
 Testing Company : Koikas Acoustics  
 Checked by : Nick Koikas  
 Place of Test: Residential apartments in Belfield, NSW  
 Client : Gerflor  
 Client Address : -


| Description of Floor System                       | Name              | Thickness (mm) | Density (SI) |
|---|-------------------|----------------|--------------|
| Kenbrock Artloc Concrete slab Suspended ceiling 0 | Kenbrock Artloc   | 6.5            | --           |
|   | Concrete slab     | 180-200        | --           |
|   | Suspended ceiling | 80-150         | --           |
|   | 0                 | --             | --           |

Room Dimensions  
 Width : 5 m  
 Length : 8 m  
 Area : 40.00 m<sup>2</sup>

Sample Dimensions  
 Width : 1 m  
 Length : 1 m  
 Area : 1 m<sup>2</sup>

| Receiver Rm                 | Location | Width | Length | Area  | Height | Volume | Room Surfaces |        |              |
|-----------------------------|----------|-------|--------|-------|--------|--------|---------------|--------|--------------|
|                             |          |       |        |       |        |        | Walls         | Floor  | Ceiling      |
| en/Dining/Living directly t |          | 5     | 8      | 40.00 | 2.7    | 108.00 | Plasterboard  | Timber | Plasterboard |


| Frequency f Hz | L'nT (one-third octave) dB |                |                         |
|----------------|----------------------------|----------------|-------------------------|
|                | Sub Base                   | Sub Base Floor | Sub Base Floor Underlay |
| 50             | 46.6                       | N/A            | 53.9                    |
| 63             | 51.0                       | N/A            | 60.3                    |
| 80             | 55.5                       | N/A            | 53.8                    |
| 100            | 55.9                       | N/A            | 55.8                    |
| 125            | 58.9                       | N/A            | 60.6                    |
| 160            | 60.3                       | N/A            | 60.3                    |
| 200            | 51.7                       | N/A            | 49.3                    |
| 250            | 50.5                       | N/A            | 47.3                    |
| 315            | 50.7                       | N/A            | 47.1                    |
| 400            | 51.6                       | N/A            | 43.4                    |
| 500            | 48.4                       | N/A            | 39.4                    |
| 630            | 46.9                       | N/A            | 31.3                    |
| 800            | 48.3                       | N/A            | 29.1                    |
| 1000           | 49.3                       | N/A            | 26.8                    |
| 1250           | 49.2                       | N/A            | 19.0                    |
| 1600           | 50.6                       | N/A            | 17.0                    |
| 2000           | 52.9                       | N/A            | 13.9                    |
| 2500           | 54.9                       | N/A            | 14.0                    |
| 3150           | 55.7                       | N/A            | 10.9                    |
| 4000           | 52.6                       | N/A            | 7.9                     |
| 5000           | 49.9                       | N/A            | 3.6                     |

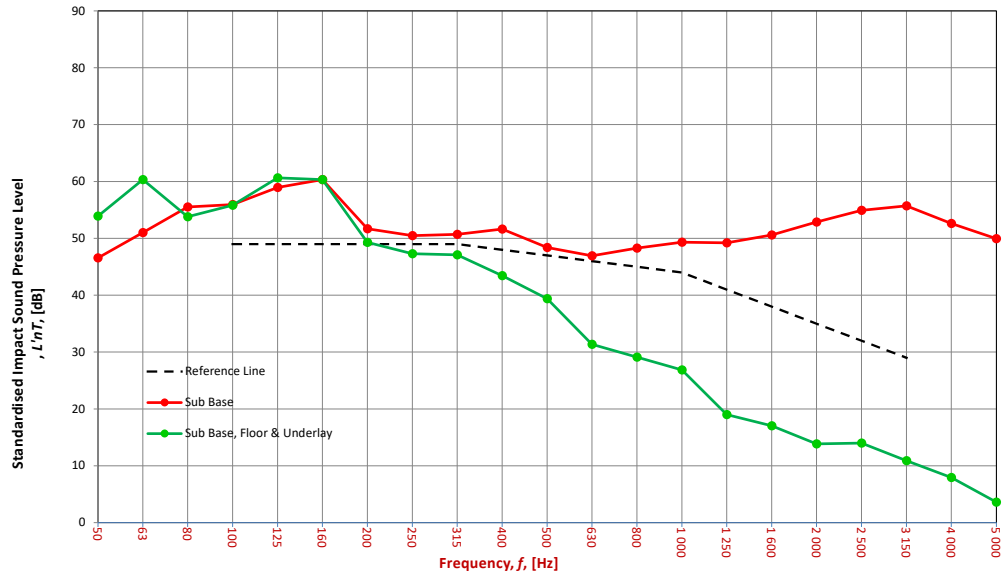

| Sub Base    |        |
|-------------|--------|
| L'nT,w      | 60     |
| Ci          | -9     |
| Ci(50-2500) | -9     |
| Ci(63-2000) | -9     |
| AAAC★       | 2 Star |
| FIC         | 44     |

| Sub Base & Floor |     |
|------------------|-----|
| L'nT,w           | N/A |
| Ci               | N/A |
| Ci(50-2500)      | N/A |
| Ci(63-2000)      | N/A |
| AAAC★            | N/A |
| FIC              | N/A |

| Sub Base, Floor & Underlay |        |
|----------------------------|--------|
| L'nT,w                     | 47     |
| Ci                         | 3      |
| Ci(50-2500)                | 4      |
| Ci(63-2000)                | 4      |
| AAAC★                      | 4 Star |
| FIC                        | 59     |

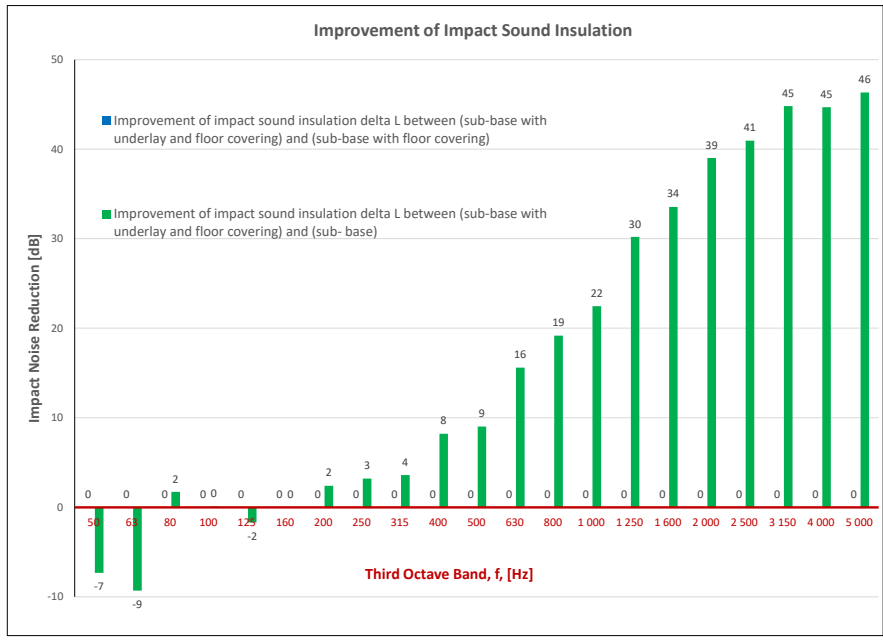

**Definitions of Noise Metrics**

**FIC:**  
Field Impact Insulation Class is a single-number rating of how well a floor system attenuates impact type sounds, such as footsteps. Calculated from third-octave band normalised impact sound pressure level data and referenced to 10 m<sup>2</sup> as described in ASTM E989. The higher the single-number rating, the better its impact insulation performance.

**L'nT,w:**  
The Weighted Standardised Impact Sound Pressure Level when measured in situ referenced to a reverberation time (RT60) of 0.5 seconds. Used by the AAAC to determine their respective Star Rating.

**Ci:**  
Spectrum adaption term is a low frequency correction factor. Typically for massive floors such as concrete, the values are about zero while for timber joist floors Ci is positive because of the low resonant frequencies. Considers frequency range between 100 -and 2500 Hz.

**Ci(50-2500):**  
Same as above, but for the frequency range 50 -2500 Hz.

**Ci(125-2000):**  
Same as above, but for the frequency range 125 -2000 Hz.

| AAAC Star R. | 2            | 3               | 4       | 5                | 6                  |
|--------------|--------------|-----------------|---------|------------------|--------------------|
| L'nT,w       | 65           | 55              | 50      | 45               | 40                 |
| FIC          | 45           | 55              | 60      | 65               | 70                 |
| Comments     | Below BCA 62 | Clearly Audible | Audible | Barely Inaudible | Normally Inaudible |