


Profile

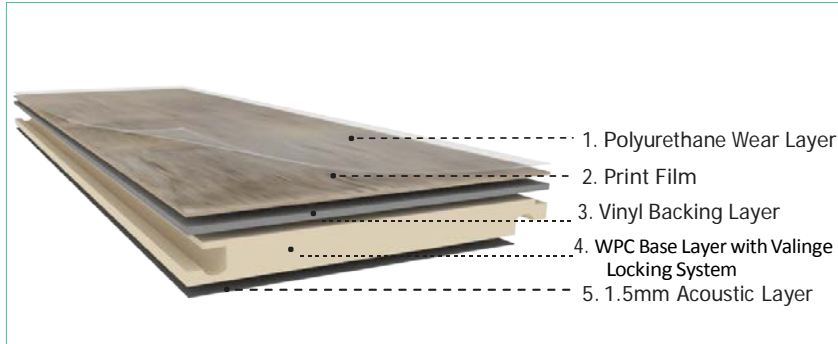

Technical Specifications

Physical Properties

Wear layer	0.50mm
Total Thickness	7.5mm
Size	180mm x 1220mm
Qty per carton	10
M ² per carton	2.196m ²

Test Results

Test		Standard	Result
Classification	Commercial	EN685	34
Water Absorption		ASTM D570-98 (2010)	0.7%
Dimensional Stability		EN434	< 0.40%
Slip Resistance	App D: Oil wet ramp	AS4586:2013	R10
	App A: Wet pendulum	AS4568:2004	P2(Y)
Colour Fastness (Light)		EN 20 ISO105-B02, ASTM F1515	Pass
VOC		ASTM D-5116-06	Pass
Reaction to fire	Critical radiant flux	AS/ISO92 39.1-2010	10.1 kW/m ²
	Smoke value	AS/ISO92 39.1-2010	316 % .min

Applications

- Retail Fitouts
- Office, Kitchen Areas
- Multi-Unit Residential
- Aged Care Living

Sustainability

AquaSmart is a low VOC product and is free from heavy metal substances making it an excellent choice for the environment.

The product has been tested by accredited lab TUEV Rheinland for Heavy Metals: *None detected.*

The product has been tested by UL Environment and its ISO 17025 accredited testing laboratories to Greenguard certification regarding emission of total Aldehydes including Formaldehyde in enclosed areas such as offices and classrooms and meets criteria to achieve Greenguard Gold.

Features

- 7.5mm thick plank for increased underfoot comfort
- 0.50mm PU wear layer
- Easy to install Valinge 2nd generation locking system. No gluing required.
- R10 slip rating
- 7 year commercial warranty
- 20 year residential warranty