


Profile

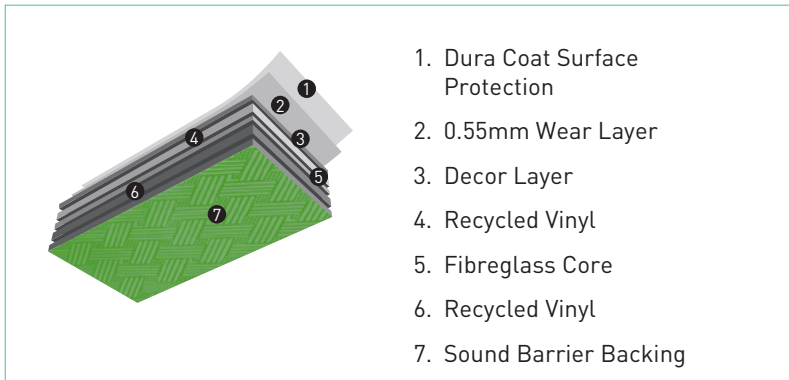

Technical Specifications

Physical Properties

Wear layer	0.55mm
Thickness	5.0mm
Size	228mm x 1219mm
Qty per carton	10
M ² per carton	2.23M ²
Dura Coat surface treatment	Yes
Underfloor heating	Suitable

Test Results

Test	Standard	Result	
Classification	Commercial very heavy	EN685	34
Residual indentation		EN433	<0.1mm
Dimensional stability		EN434	<0.40%
Colourfastness to Light		ISO105-B02	6
Abrasion Resistance		EN428	P
Slip resistance	Oil wet ramp	AS/NZS4586	R10
	Wet pendulum	AS/NZS4586	X
Reaction to fire	Critical radiant flux	AS/ISO9239-1	8.8kw/M ²
	Smoke value	AS/ISO9239-1	604.9%
Impact sound Reduction		ISO717-2	9dB
Recommended adhesive	Kenbrock Smart Grip 8012		

Applications

- Residential
- Apartments
- Retail
- Administration Common Areas
- Reception Areas
- Aged Care

Sustainability

Urban Fit is a low VOC product and is free from any heavy metal substances. Urban Fit is produced in an ISO9001 and ISO14001 certified facility and contains not less than 25% recycled content making it an excellent choice for the environment.

Features

- 'Drop Down' Modular Installation
- 5.3mm thick plank for increased underfoot comfort
- Fibreglass core layer for outstanding product stability
- 0.50mm PU wear layer
- Dura Coat Surface Protection for ease of maintenance
- 10 year commercial warranty
- Lifetime residential warranty