


## Technical Specifications

	Value	Standard
Classification		
Commercial very heavy	34	EN 685
Industrial heavy	43	EN 685
Width	2.0M	EN 426
Roll length	20M	EN 426
Overall thickness	2.0mm	EN 428
Wear layer thickness	0.70mm	EN 429
Total mass	2,800g/m <sup>2</sup>	EN 430
Residual indentation	0.04mm	EN 433
Dimensional stability	≤0.10%	EN 434
Colourfastness to light	6-7	EN ISO 20105-B02
Abrasion resistance	T	EN 660-2
Slip resistance		
Oil-wet ramp	R10	AS/NZS 4586
Wet pendulum	P3	AS/NZS 4586
Reaction to fire		
Critical radiant flux	8.4kw/m <sup>2</sup>	ASISO 9239.1
Smoke value	95%	ASISO 9239.1
Impact sound reduction	5db	EN ISO 717-2
Fungal resistance	0 growth rate	EN ISO 846
Static electrical propensity	≤2.0kv	EN 1815
Chemical resistance	High Resistance	EN 423
Recommended adhesive		Kenbrock Hardgrip

## Profile

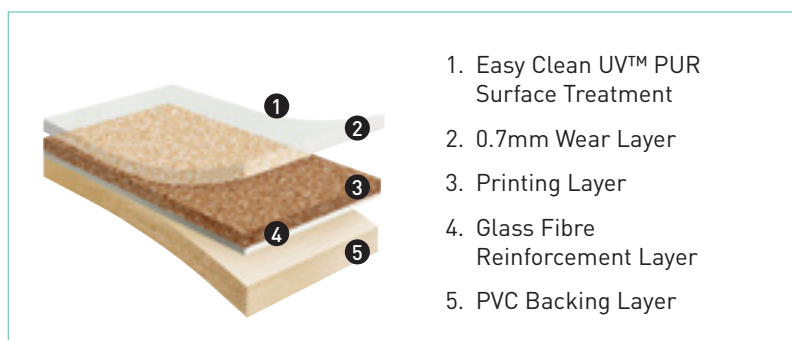

## Applications

- Health care and aged care
- Community housing
- Educational facilities
- Public buildings

## Sustainability

Durable is made with 25% post consumer recycled content.

## Features

- Superior durability and abrasion resistance (Group T)
- High Density 0.7mm wear layer
- Easy Clean UV™ PUR surface treatment to minimise maintenance costs
- Anti-Bacterial and Anti-Fungal treated for hygienic use
- Reinforced with glass fibre for improved dimensional stability
- 10 Year commercial warranty