



New Flooring Innovation

We have taken the top features from LVT Looselay and combined then with the core strengths of Hybrid to create a new flooring category.

Introducing...

eclipse

The first affordable Mochar Hybrid

It is a quality Hybrid flooring that eliminates the need for a click system and dispenses with the need for scotia.

No Click No Scotia No Fuss




It offers a tough indentation resistant surface and is dimensionally stable.

Being Phthalate free and made from 100% virgin materials, it is family and pet friendly.



www.kenbrock.com.au

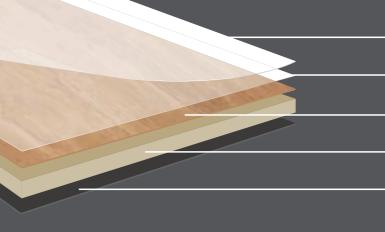

HOW THE CONSTRUCTION LAYERS BENEFIT YOU

Aluminium Oxide PU Surface Layer

Prolongs the life and beauty of your floor by providing a superior abrasion resistance barrier. It is also one of the components in making this one of the safest plank floorings available, achieving a P3 and R10 classification for slip resistance, as tested in accordance with Australian Standard AS4586:2013. A copy of this certificate is available on our web site www.kenbrock.com.au

Heavy Duty Wear Layer

The 0.55mm commercial grade wear layer is designed to accommodate full commercial traffic. In your home we have given it a lifetime Residential wear out warranty to give you peace of mind.

High Definition Print Film Layer

Our High Definition Print Film gives your floor the authentic visuals associated with the finest solid timber floors.

Limestone Rigid Core

The solid Limestone Core gives Eclipse enhanced durability and dimensional stability. The product has been successfully tested in accordance with the international standard ISO 2399–2018. This test measures the planks ability to retain its original dimensions when exposed to extreme temperature change, including taking the product from 23°C to 80°C and back again. Following 2 years of research and development we are able to offer this new product type which dispenses with the need for a click system, making it faster and easier to install without having concern for damage to the click mechanism.

Comfort Layer

Our comfort layer provides underfoot comfort whilst reducing noise transfer.

THE LAYERS OF MODULAR HYBRID

Aluminum Oxide PU Surface Layer Heavy Duty Wear Layer High Definition Print Film Layer Limestone Rigid Core Comfort Layer



Select Maple

ECL10

Warm and welcoming Maple, originally a gift to us from across the Americas and now Queensland, generally features straighter grain, a fine texture and subtle colour with tinges that are often enhanced by the local light. These gentle features of Select

Maple combine to deliver a relaxed atmosphere for a simpler and softer feel.








Aged Spotted Gum ECL09


There is a subtle balance between mediocrity and making a statement about the choice of floors in your home or office. Aged Spotted Gum, an eastern Australian variety of Eucalypt with a distinctive grain pattern and assertive colour pallet, make it a natural choice for the serious working areas in your house and your life.



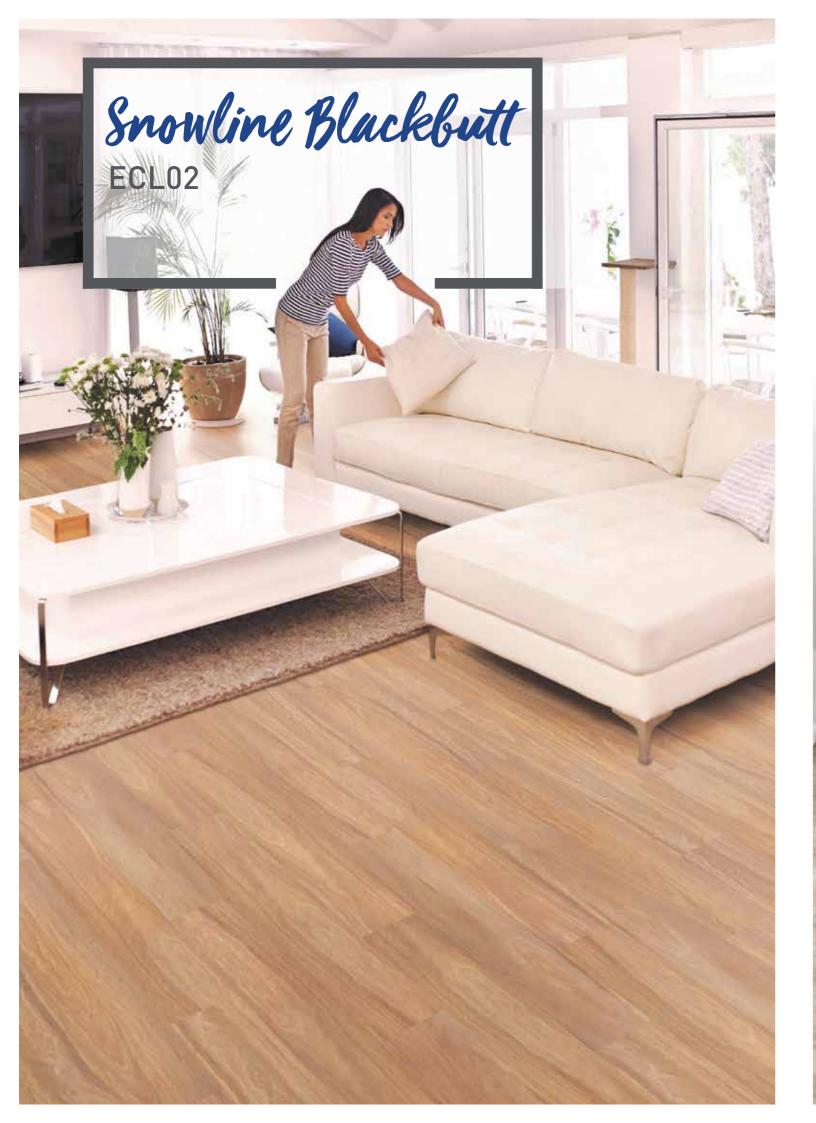


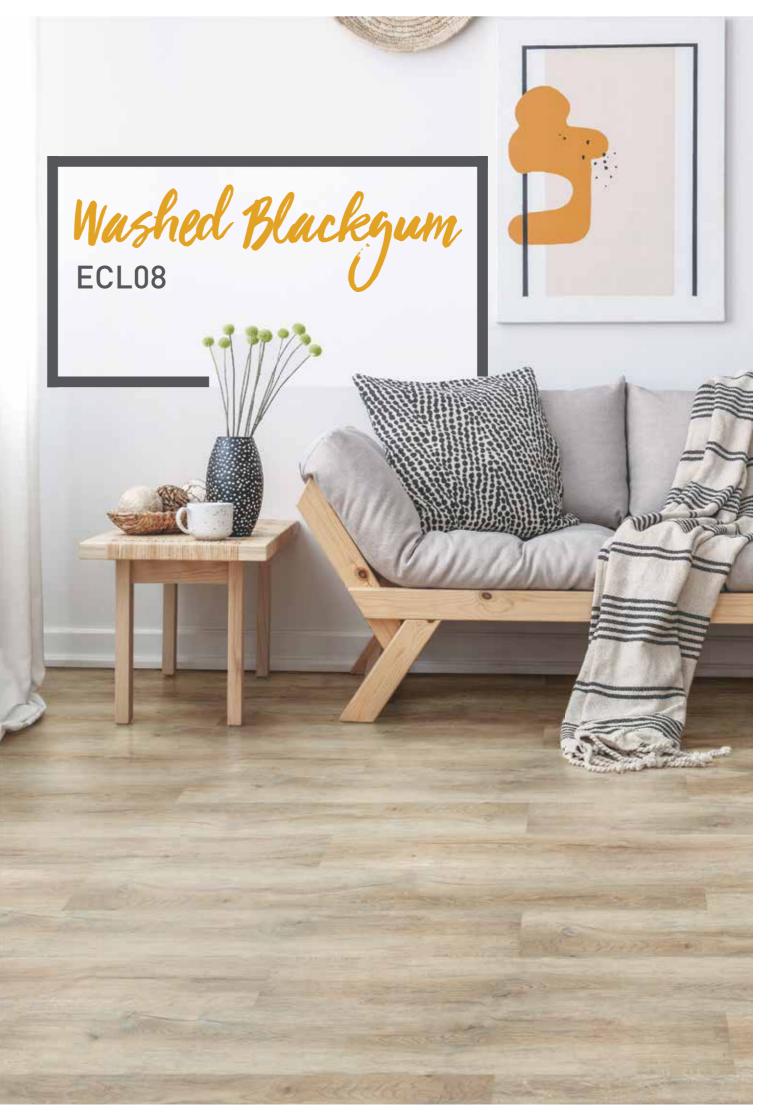

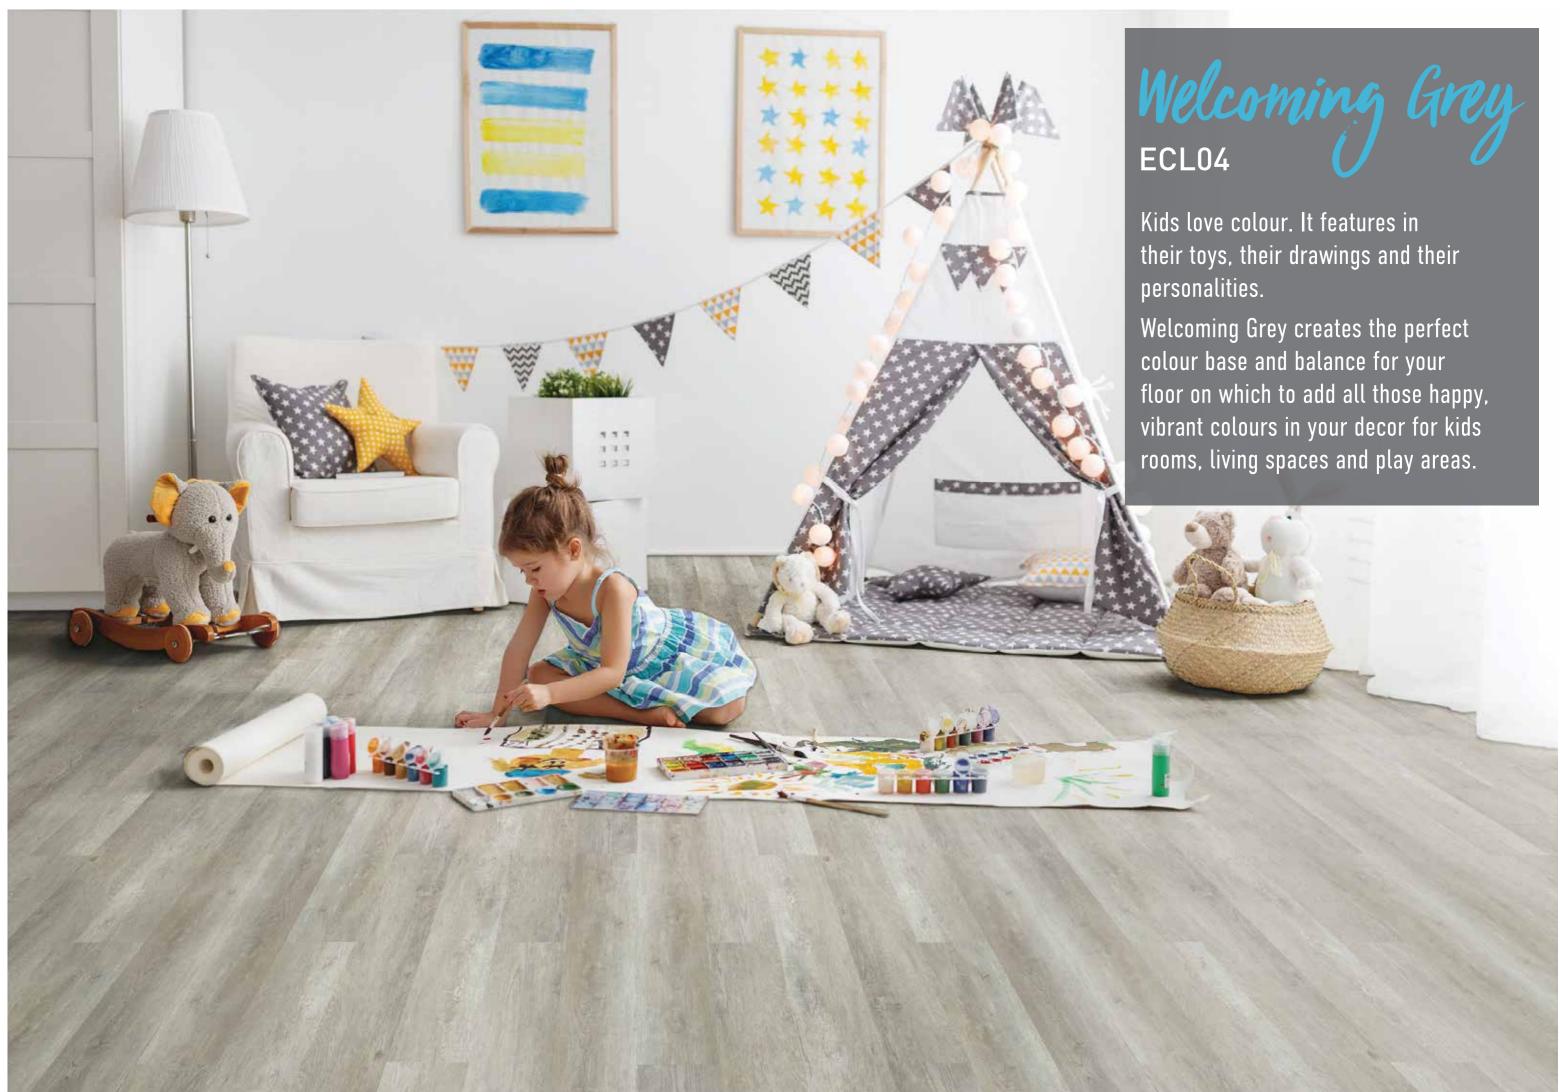

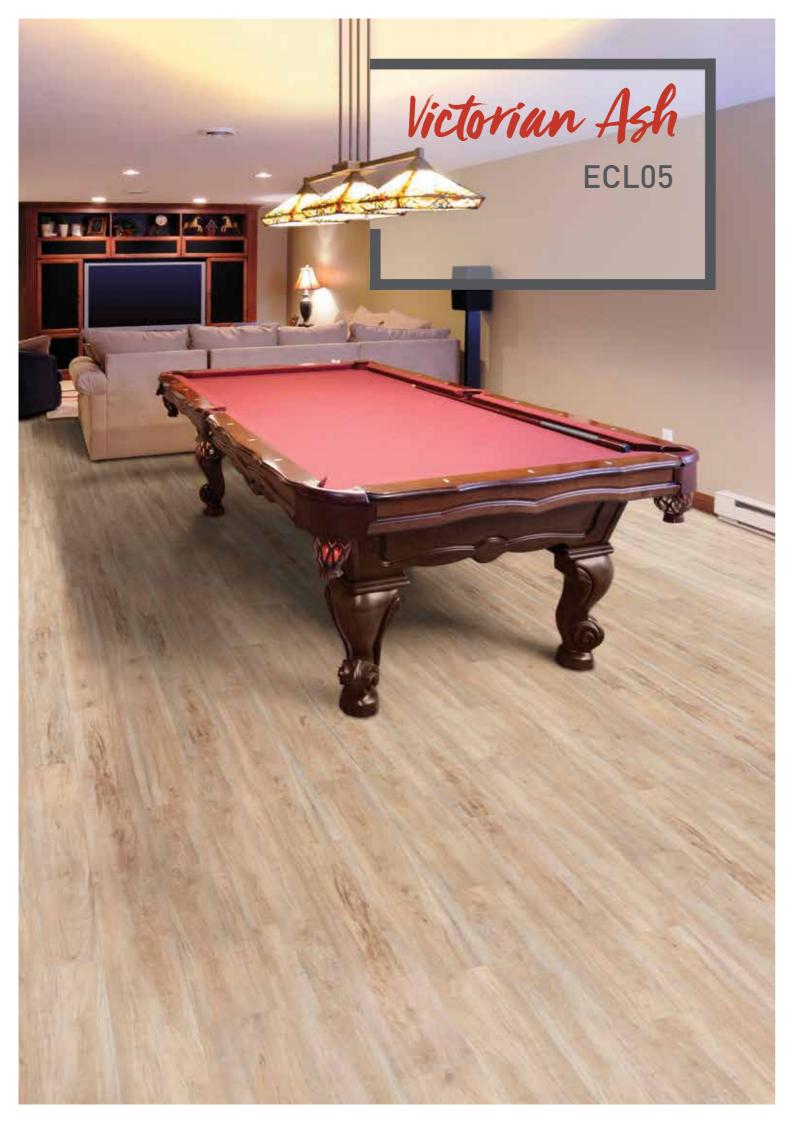



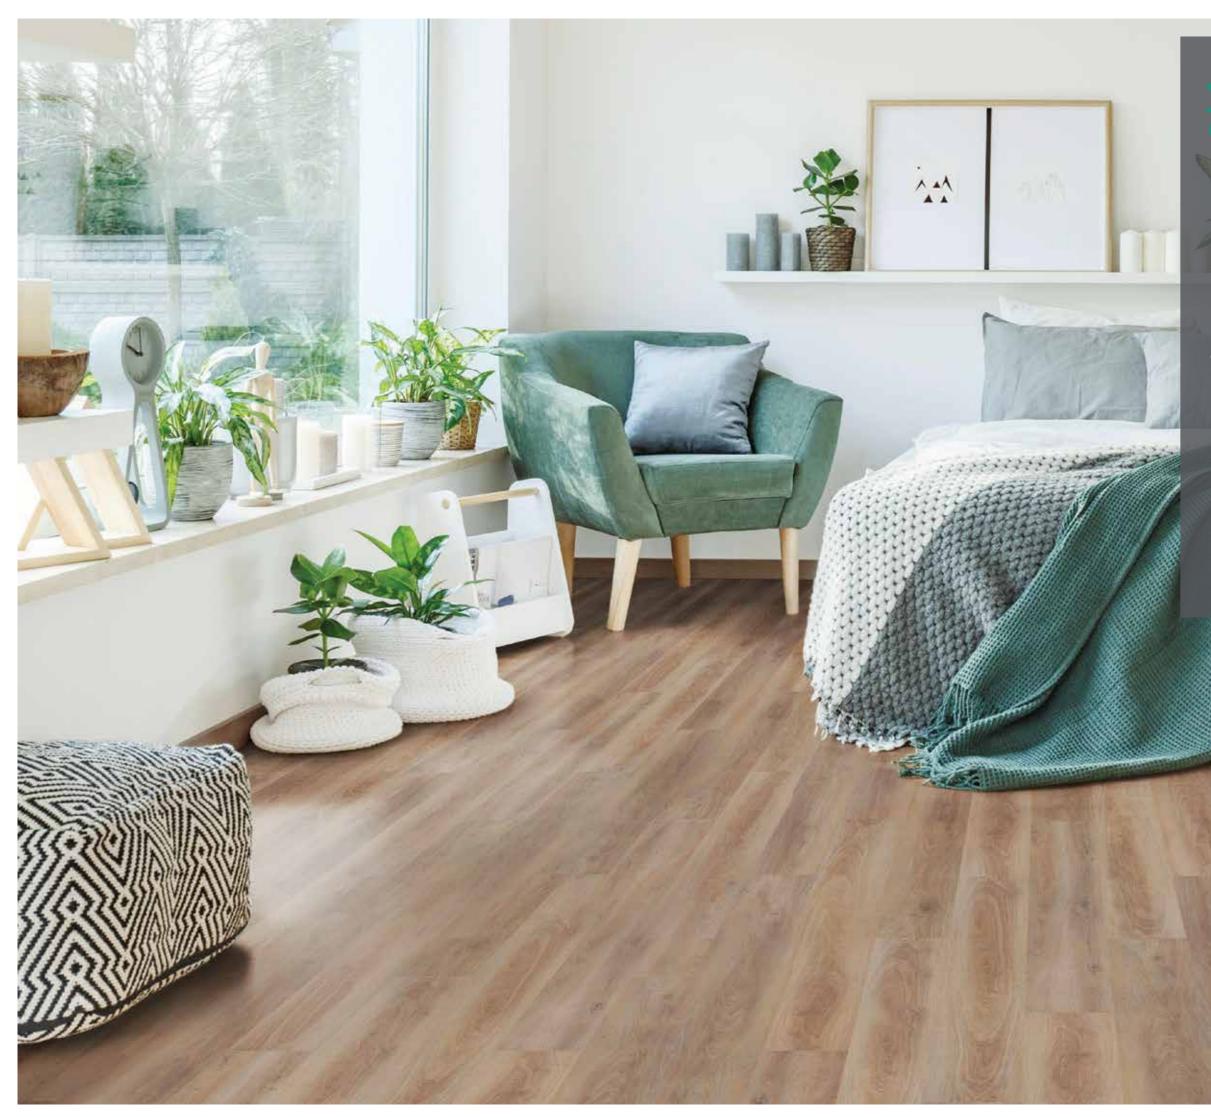


Feature Gum ECL06


From over 700 varieties of native Australian Gums the designers at Kenbrock have created Feature Gum for it's combination of subtle tones for a gentle and relaxed ambience.

Its combination of unique grain patterns delivers a soft and relaxed atmosphere to complement the special quiet places you long for in your home.

eclipse

ECL01 Himalayan Oak





ECL02 **Snowline Blackbutt**

ECL05 Victorian Ash



ECL03 **Darling Spotted Gum**

Full Colour Range



ECL09 **Aged Spotted Gum**

MAINTENANCE AND CARE GUIDE

All Floors require some type of regular care to maintain their beauty. Eclipse Modular Hybrid products are easy to care for and will deliver many years of satisfaction by following these simple maintenance suggestions.

INITAL CLEANNG AFTER INSTALATION

- Thoroughly sweep or vacuum to remove any surface dust and/or dirt.
- Wash the floor with cool to luke warm water using Kenbrock Maintain diluted in accordance with the instructions.

REGULAR MAINTENANCE

Regular maintenance not only keeps the floor clean, but can also reduce the frequency of more extensive maintenance.

DAILY

- Sweep, mop or vacuum to remove • dust and other loose particles.
- Spot clean any marks with Kenbrock Maintain in accordance with instructions.

WFFKIY

- Sweep, mop or vacuum to remove dust and other loose particles.
- Wash the floor with cool to luke warm water using Kenbrock Maintain diluted in accordance with instructions.

RESTORATIVE MAINTENANCE

If the floor surface becomes dulled you can refurbish the surface appearance by



applying a floor sealer as follows: Strip the floor using Kenbrock

- Remove mixed with clean warm water and applied in accordance with instructions and allow to dry completely.
- When the floor is completely dry apply a thin and even coat of undiluted Kenbrock Rejuvenate across the floor using an applicator or quality cotton mop with wringer and bucket. Please ensure the mop soaking into the mop. Kenbrock Rejuvenate is available in either a satin or gloss finish.
- at right angles to the first coat and allow to dry.
- then dry buff.

GENERAL

- Never slide furniture or fittings over an unprotected floor and ensure flooring protectors are used under the feet of furniture and appliances. Keep the floor surface clear of dirt, grit, sand and other abrasive materials, which can be walked into entrance matting.
- DO NOT use rubber backed mats as they can stain your new floor.
- All spillages should be removed immediately.
- DO NOT use general household cleaners on your floor unless they are specifically for vinyl floors. Kenbrock Flooring recommends the use of Kenbrock Maintain as part of warranty.
- cleaning agent that contains bleach. DO NOT use any kind of steam or heat mop on your Modular Hybrid products.

is slightly damp to prevent the sealer

Allow to dry then apply a second coat

• Wait 24 hours for the finish to harden

your home, by the use of appropriate

your regular floor maintenance. Use of other products may invalidate your

DO NOT use washing up liquid or any

TIPS FOR KEEPING YOUR PLANKS FROM FADDING

- The intensity of UV light (sunlight) is what generally causes the most fading over time. Window coverings should be used to protect your floor from direct sunlight. If that is not practical use window tints or film which block harmful UV rays while still letting light through.
- Never use anything containing a bleaching agent as it will not only fade the planks, but could also damage the surface.
- As a fail safe purchase extra planks so you can easily replace damaged or faded planks from the same batch.

TROUBLE SHOOTING SCUFF MARKS

These are caused by friction from foot traffic across the surface of the floor. Light scuff marks can be removed by spot cleaning with Kenbrock Maintain diluted in accordance with instructions. Heavier scuff marks may require restorative maintenance as per the above instructions.

SCRATCHING

Caused by excessive grit, dirt or other abrasive particles on the floor. Minor scratching may require restorative maintenance as per the above instructions. Any deep scratching or gouges in the planks will result in the individual plank/s needing to be replaced.





USAGE - Heavy Domestic/Commercial

THICKNESS - 4.5mm

WEAR LAYER - 0.55mm

SIZE - 228.6mm x 1498.6mm

OTY PER CTN - 8 Planks

M² PER CTN - 2.72m²



WARRANTY Lifetime Residential 15 Year Commercial

LIFE

ΊΜΕ



Product colours are depicted within the limitations of the printing process. Actual product should be viewed prior to final selection.

No Click. No Scotia. No Fuss!!

clipse

www.kenbrock.com.au