



Andersen's

THE RESPECTED NAME IN FLOOR COVERINGS



easyFIT

Innovative design / made easy!!


easyFIT


The premium Modular plank of its type on the Australian market. This product underwent many years of development and this has paid off with its success in both residential and commercial installations.

EasyFIT offers the following benefits:

- The 5.0mm thick plank provides superior and supportive underfoot comfort and excellent acoustic properties.
- The 0.5mm PUR wear layer combined with the Dura Coat surface protection creates a product that will look great for an extended period. This is backed up by a lifetime residential and 15 year commercial manufacturer's warranty.
- It contains a thick fibreglass reinforcement layer throughout the plank for superior stability.
- Ease of installation, EasyFIT simply 'drops' into place using simple guidelines.
- EasyFIT is suitable for most commercial applications.
- FloorScore certified range meeting strict indoor air quality emissions, making for a safe and clean environment,
- The EasyFIT range contains quality recycled material and is 100% recyclable product.
- The factory is committed to product stewardship where product is re-utilized at the end of its life-cycle.
- Contains antibacterial and anti-fungal technology.

*Front Cover - KL410 Circus Wood

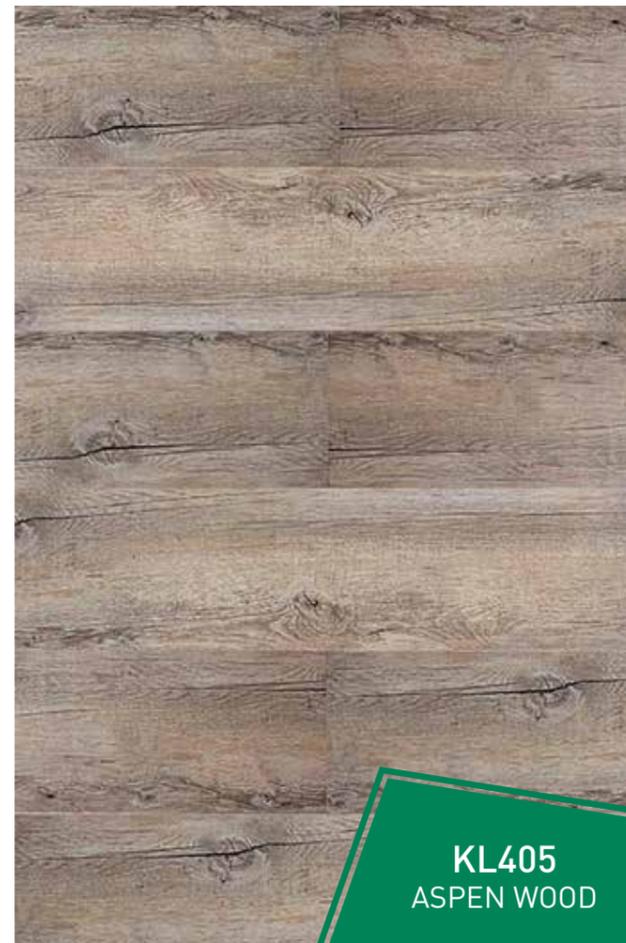

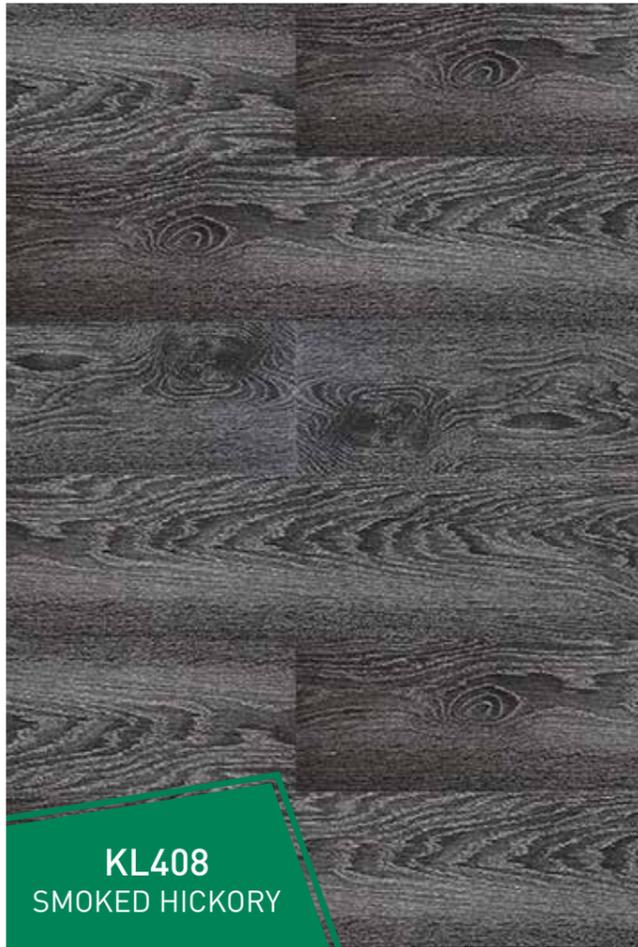

KL408
SMOKED HICKORY



KL409
CANADIAN HICKORY



KL410
CIRCUS WOOD



KL412
CLASSIC BLACKBUTT



KL415
WHITE ASH



KL417
PEARL GUM



KL434 MURRAY RIVER SPOTTED GUM



KL405 ASPEN WOOD

EASYFIT MAINTENANCE AND CARE GUIDE

All floors require some type of regular care to maintain their beauty. EasyFIT flooring is easy to care for and will deliver many years of satisfaction by following these simple maintenance suggestions.

INITIAL CLEANING AFTER INSTALLATION

- Thoroughly sweep or vacuum to remove any surface dust and/or dirt.
- Wash the floor with cool lukewarm water using Kenbrock Maintain diluted in accordance with the instructions.

REGULAR MAINTENANCE

Regular maintenance not only keeps the floor clean, but can also reduce the frequency of more extensive maintenance.

DAILY

- Sweep, mop or vacuum to remove dust and other loose particles.
- Spot clean any marks with Kenbrock Maintain in accordance with the instructions.

WEEKLY

- Sweep, mop or vacuum to remove dust and other loose particles.
- Wash the floor with cool to lukewarm water using Kenbrock Maintain diluted in accordance with the instructions.

RESTORATIVE MAINTENANCE

If the floor surface becomes dulled you can refurbish the surface appearance by applying a floor sealer as follows:

- Strip the floor using Kenbrock Remove mixed with clean warm water and applied in accordance with the instructions and allow to dry completely.
- When the floor is completely dry apply a thin layer and even coat of undiluted Kenbrock Rejuvenate across the floor using an applicator or quality cotton mop with ringer and bucket. Please ensure mop is slightly damp to prevent sealer soaking into the mop. Kenbrock Rejuvenate is available in either satin or gloss finish.
- Allow to dry then apply a second coat at right angles to the first coat and allow to dry.
- Wait 24 hours for the finish to harden then dry buff.

GENERAL

- Never slide furniture or fittings over an unprotected floor and ensure flooring protectors are used under the feet of furniture and appliances.
- Keep the floor surface clear of dirt, grit, sand and other abrasive materials, which can be walked into your home, by the use of appropriate entrance matting.

- DO NOT use rubber backed mats as they can stain your new floor.
- All spillages should be removed immediately
- DO NOT use general household cleaners on your floor unless they are specifically for vinyl floors. Kenbrock recommends the use of Kenbrock Maintain as part of your regular floor maintenance. Use of other products may invalidate your warranty.
- DO NOT use washing up liquid or any cleaning agent that contains bleach.
- DO NOT use any kind of steam or heat mop on your EasyFIT flooring.

TIPS FOR KEEPING YOUR PLANKS FROM FADING

The intensity of UV light (sunlight) is what generally causes the most fading over time

- Window coverings should be used to protect your floor from direct sunlight. If it is not practical use window tints or film which block harmful UV rays while still letting light through.
- Never use anything containing a

bleaching agent as it will not only fade the planks, but could also damage the surface.

- As a fail safe purchase extra plank so you can easily replace damaged or faded planks from the same batch.

TROUBLE SHOOTING SCUFF MARKS

These are caused by friction from foot traffic across the surface of the floor. Light scuff marks can be removed by spot cleaning with Kenbrock Maintain diluted in accordance with the instructions. Heavier scuff marks may require restorative maintenance as per the above instructions.

SCRATCHING

Caused by excessive grit, dirt or other abrasive particles on the floor. Minor scratching may require restorative maintenance as per the above instructions. Any deep scratching or gouges in the planks will result in the individual plank/s needing to be replaced.



**KL418
BLACK FOREST OAK**



**KL434
MURRAY RIVER
SPOTTED GUM**



KL406 GREY EUCALYPTUS




Andersen

THE RESPECTED NAME IN FLOOR COVERINGS

PRODUCT SPECIFICATIONS

USAGE

Heavy Domestic Commercial



THICKNESS 5.0mm

WEAR LAYER 0.50mm

PLANK SIZE 178mm x 1219mm

QTY PER CTN 10 planks

M² PER CTN 2.17 m²



WARRANTY

Lifetime Residential
15 Year Commercial



Product colours are depicted within the limitations of the printing process. Actual product should be viewed prior to final selection.