

HARMONY HEALTH, SAFETY AND PERFORMANCE The Harmony range of flooring has been manufactured with due care to the planet we all share and the wellbeing of all those who inhabit it. In order to minimise its footprint the Harmony range is: Manufactured using at least 25% pre and post consumer recycled content, minimising manufacturing waste. Fully recyclable Manufactured in ISO9001 and ISO 14001 certified facilities, minimising energy consumption and greenhouse emissions • Free from all harmful fillers and plasticisers Low VOC and DOP free · A low maintenance product, promoting lower use of energy, detergents and water. As a result we can enjoy the look of the worlds most beautiful timbers without harming a single forest. Front Cover - HP802 Heritage Blackbutt

HEALTH

Smoother flooring surfaces like Harmony have been known to be a benefit to those with respiratory conditions as they leave nowhere for mites and allergens to hide.

VERSATILITY

The Harmony range is designed for optimum performance from light to heavy traffic in both domestic and commercial, indoor applications.

HARMONY

ARTISAN Pages 4-9

HARMONY PLANK Pages 10-13

COMFORT

construction not noise but is easier on legs and feet.

ALOXPLUS

An advanced abrasion resistance surface coating that is incorporated into the flooring during the manufacturing process. This floor treatment maximises the protection of your floor and makes it easier to maintain and extends its life.

HARMONY

GRANGE Pages 14-17

PHTHALATE FREE

The use of "phthalate free' plasitics has long been the safety standard set for the manufacture of babies' bottles and toddlers' toys.

You can now be assured that the Harmony phthalate free floor range your children are playing on, has been manufactured applying the same principles and concerns for their safety.

HARMONY

CARING FOR YOUR FLOOR Pages 18-19

HARMONY ARTISAN

Create tranquility with perfectly crafted Harmony


The word 'artisan' originates from the Italian of the 1500s... 'a person skilled in applied art: a craftsperson.'

The Artisan range is designed to appeal to the touch as well as the eye. Inspired by the diverse and stunning timers of Australia from the distinctive features of Marri to the alluring beauty of spotted gum. With its hand scraped, embossed timber textures it echoes the unique touch and feel of our native timbers.







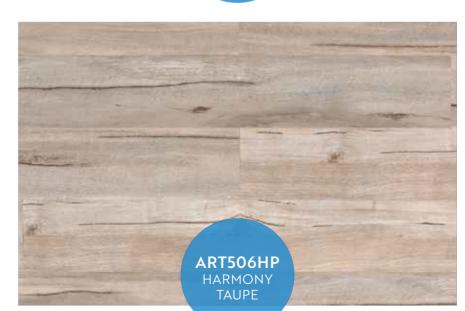











ART515HP Attitude





WARRANTY 17 year domestic

5 year commercial

QTY PER CARTON 15 planks
M² PER CARTON 3.34m²

















HARMONY PLANK Bringing Harmony and Elegance into your home

Harmony plank is a cost effective solution for timber look floor. The finest timbers were used to produce this range, creating a wide colour palette from elegant oak blend to the striking visual of blackbutt.

AloxPlus is an advanced abrasion resistance coating used to maximise the protection of your floor and extending its life. The resilient construction minimises the noise as well as making it easier on the legs and feet.

11





HARMONY GRANGE

No longer pay extra for Premium Commercial

The designs behind the Harmony Grange collection were driven by the need to create modern, clean lines and to deliver practical solutions for both residential and commercial applications. Available in a wide selection of eight timbers, from the rich glow of premium oak to the cool and contemporary hues of Casablanca.

Designed for optimum performance, with the advance AloxPlus surface protection layer and a heavy duty wear layer, accompanied with a Lifetime Residental Warranty. Harmony Grange is a superior economical choice.

















CARING FOR YOUR HARMONY FLOOR

All Floors require some type of regular care to maintain their beauty. The Harmony ranges are easy to care for and will deliver many years of satisfaction by following these simple maintenance suggestions.

INITIAL CLEANING AFTER INSTALLATION

Vacuum or sweep the floor to remove any loose dirt or grit. Wash the floor with cool to lukewarm water using Kenbrock Maintain diluted in accordance with instructions.

REGULAR MAINTENANCE

Regular Maintenance not only keeps the floor clean, but can also reduce the frequency of more extensive maintenance.

DAILY

Sweep, mop or vacuum to remove dust and other loose particles.

Spot clean any marks with Kenbrock Maintain in accordance with instructions.

WEEKLY

Sweep, mop or vacuum to remove dust and other loose particles.

> Wash the floor with cool to lukewarm water using Kenbrock Maintain diluted in accordance with instructions.

RESTORATIVE MAINTENANCE

If over time your floor surface becomes dulled you can refurbish the surface appearance by applying a floor sealer as follows:

Strip the floor using Kenbrock Remove mixed with clean warm water and applied in accordance with instructions. Allow floor to dry completely.

When the floor is completely dry apply a very thin but even coat of undiluted Kenbrock Rejuvenate across the floor using an applicator or quality cotton mop with wringer and bucket. Please ensure the mop is slightly damp to prevent the sealer soaking into the mop. Kenbrock Rejuvenate is available in either a Satin or Gloss finish.

Allow to dry then apply a second coat at right angles to the first coat and allow to

For high traffic areas apply a third coat of Kenbrock Rejuvenate.

GENERAL

Never slide furniture or fittings over an unprotected floor and ensure flooring protectors are used under the feet of furniture and appliances. Keep the floor surface clear of dirt, grit, sand and other abrasive materials, which can be walked into your home, by the use of appropriate entrance matting.

DO NOT use rubber backed mats as they can stain vour new floor.

All spillages should be removed immediately.

DO NOT use general household cleaners on your floor unless they are specifically for vinyl floors. Kenbrock Flooring recommends the use of Kenbrock Maintain as part of your regular floor maintenance. Use of other products may invalidate your warranty.

DO NOT use washing up liquid or any cleaning agent that contains bleach.

DO NOT use any kind of steam or heat mop.

The intensity of UV light can be extreme and can result in colour fade. Do not expose your floor to direct sunlight for extended periods of time. Window coverings should be used to protect your floor from sunlight.

TROUBLE SHOOTING SCUFF MARKS

These are caused by friction from foot traffic across the surface of the floor. Light scuff marks can be removed by spot cleaning with Kenbrock Maintain diluted in accordance with instructions. Heavier scuff marks may require Restorative Maintenance as per the above instructions. Scratching is generally caused by excessive grit, dirt or other abrasive particles on the floor. You can assist in the prevention of scratching by using appropriate entrance matting. Minor scratching may require restorative maintenance as per the above instructions. Any deep scratching or gouges in the planks will result in the individual plank/s needing to be replaced.



CARPET COURT

CARPETCOURT.COM.AU

Harmony Ranges are manufactured by Kenbrock exclusively for Carpet Court Australia.

Product colours are depicted within the limitations of the printing process. Actual product should be viewed prior to final selection.

