



smart drop
ULTIMATE


www.kenbrock.com.au

smartdrop

ULTIMATE

Smartdrop Ultimate is the market leading option where comfort, practicality and style reign supreme. These vinyl planks are 5mm thick with a 0.55mm wear layer, giving them superior durability and added comfort underfoot. With a 1.5m long plank format they will give your home a large, more open feel.

This flooring is made up of contemporary oak designs and realistic Australian timbers, resulting in flooring with a distinguished look and feel. This high-quality flooring, with colour references to suit all home decors, will not disappoint.

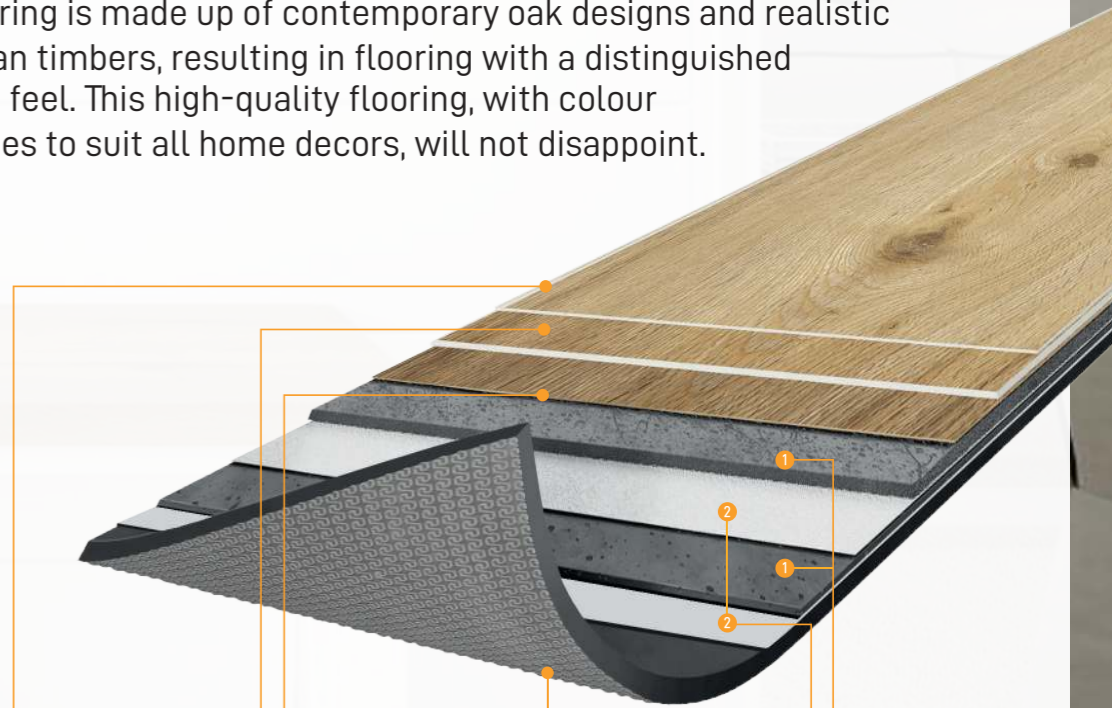

<p>PUR+MATT</p> <p>Easy maintenance</p>	<p>4D DESIGN</p> <p>MATT SURFACE</p> <p>Natural look</p>	<p>GRIP-WAVE BACKLAYER</p> <p>ANTI-SKID BACKING</p> <p>Stronger adhesion Better acoustics Moisture resistance</p>	<p>DUO CORE TECHNOLOGY</p> <p>1 RESILIENT COMFORT CORE</p> <p>Noise absorption</p> <p>Soft underfoot</p> <p>2 DOUBLE FIBREGLASS CORE</p> <p>The best stability</p> <p>Renovation over ceramic 4mm joint</p>
	<p>CRYSTAL WEAR LAYER</p> <p>High definition design & colour</p>		
	<p>STRUCTURED EMOSS & BEVEL</p> <p>Ultra realistic surface</p>		



SDU1-0434
Native Spotted Gum



SDU1-0424
Ornate Blackbutt



SDU1-0426
Tassie Sassafras



SDU1-0441
White Washed Oak



SDU1-0433
Enduring Blackbutt



SDU1-0440
Warm Honey Oak



SDU1-0445
Iridium Oak



SDU1-0442
Cracked Limed Oak



SDU1-0443
Feature Walnut



SDU1-0425
Wine Barrel Oak



SDU1-0420
Provincial Oak

MAINTENANCE AND CARE GUIDE

All floors require some type of regular care to maintain their beauty. Smartdrop Ultimate flooring is easy to care for and will deliver many years of satisfaction by following these simple maintenance suggestions.

INITIAL CLEANING AFTER INSTALLATION

- Thoroughly sweep or vacuum to remove any surface dust and/or dirt.
- Wash the floor with cool lukewarm water using Kenbrock Maintain diluted in accordance with the instructions.

REGULAR MAINTENANCE

Regular maintenance not only keeps the floor clean, but can also reduce the frequency of more extensive maintenance.

DAILY

- Sweep, mop or vacuum to remove dust and other loose particles.
- Spot clean any marks with Kenbrock Maintain in accordance with the instructions.

WEEKLY

- Sweep, mop or vacuum to remove dust and other loose particles.
- Wash the floor with cool to lukewarm water using

Kenbrock Maintain diluted in accordance with the instructions.

RESTORATIVE MAINTENANCE

If the floor surface becomes dulled you can refurbish the surface appearance by applying a floor sealer as follows:

- Strip the floor using Kenbrock Remove mixed with clean warm water and apply in accordance with the instructions and allow to dry completely.
- When the floor is completely dry apply a thin layer and even coat of undiluted Kenbrock Rejuvenate across the floor using an applicator or quality cotton mop with ringer and bucket. Please ensure mop is slightly damp to prevent sealer soaking into the mop. Kenbrock Rejuvenate is available in either satin or gloss finish.
- Allow to dry then apply a second coat at right angles to the first coat and allow to dry.
- Wait 24 hours for the finish to harden then dry buff.

GENERAL

- Never slide furniture or fittings over an unprotected floor and ensure flooring protectors are used under the feet of furniture and appliances.
- Keep the floor surface clear of dirt, grit, sand and other abrasive materials, which can be walked into your home, by the use of appropriate entrance matting.
- DO NOT use rubber backed mats as they can stain your new floor.
- All spillages should be removed immediately.
- DO NOT use general household cleaners on your floor unless they are specifically for vinyl floors. Kenbrock recommends the use of Kenbrock Maintain as part of your regular floor maintenance. Use of other products may invalidate your warranty.
- DO NOT use washing up liquid or any cleaning agent that contains bleach.
- DO NOT use any kind of steam or heat mop on your Smartdrop Ultimate flooring.

TIPS FOR KEEPING YOUR PLANKS FROM FADING

The intensity of UV light (sunlight) is what generally causes the most fading over time.

- Window coverings should be used to protect your floor

from direct sunlight. If it is not practical use window tints or film which block harmful UV rays while still letting light through.

- Never use anything containing a bleaching agent as it will not only fade the planks, but could also damage the surface.
- As a fail safe purchase extra plank so you can easily replace damaged or faded planks from the same batch.

TROUBLE SHOOTING

SCUFF MARKS

These are caused by friction from foot traffic across the surface of the floor. Light scuff marks can be removed by spot cleaning with Kenbrock Maintain diluted in accordance with the instructions. Heavier scuff marks may require restorative maintenance as per the above instructions.

SCRATCHING

Caused by excessive grit, dirt or other abrasive particles on the floor. Minor scratching may require restorative maintenance as per the above instructions. Any deep scratching or gouges in the planks will result in the individual plank/s needing to be replaced.



SDU1-0444
Crosscut Blackwood

PRODUCT SPECIFICATIONS

USAGE - Heavy Domestic/Commercial



THICKNESS - 5.0mm

WEAR LAYER - 0.55mm

PLANK SIZE - 230mm x 1500mm

QTY PER CTN - 5 planks

M² PER CTN - 1.725m²



WARRANTY
Lifetime Residential
15 Year Commercial



Product colours are depicted within the limitations of the printing process. Actual product should be viewed prior to final selection.



Kenbrock

Head Office
17 Cato Street
Hawthorn East, VIC 3123
Ph - 03 9765 2222

QLD Office
2 Kingsbury Street
Brendale, QLD 4500
Ph - 07 3881 1000

WA & NT - 1800 674 145
TAS & SA - 1800 674 145
NSW - 1300 785 000
www.kenbrock.com.au