



Maintenance Guide

Keep your floor looking new for longer



MAINTENANCE AND CARE GUIDE

All floors require some form of regular care to maintain their beauty. With the PUR surface protection layer your flooring is not only protected against scuffs and scratches but is easy to care for and will deliver many years of satisfaction by following these simple maintenance suggestions.




REGULAR MAINTENANCE

The regular everyday maintenance will not only keep your floor clean, but can also reduce the frequency of any more extensive maintenance.

EVERYDAY



Sweep, mop or vacuum to remove dust and other loose particles from your floor.

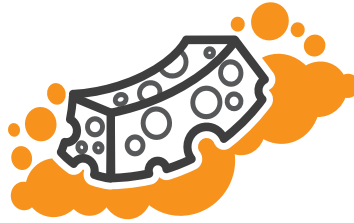

Spot clean any marks with Kenbrock Maintain in accordance with the instructions on the bottle.

WEEKLY



Sweep, mop or vacuum to remove dust and other loose particles from your floor.



Wash your floor with cool to lukewarm water using Kenbrock Maintain diluted in accordance with instructions on the bottle.

RESTORATIVE MAINTENANCE

If your floor surface becomes dulled, you can refurbish the surface appearance by applying the Kenbrock Rejuvenate floor sealer as follows:

- 1** Strip your floor using Kenbrock Remove mixed with clean warm water and applied in accordance with the instructions on the bottle and allow to dry completely.
- 2** When the floor is dry apply a thin layer and even coat of undiluted Kenbrock Rejuvenate across the floor using an applicator or quality cotton mop with ringer bucket. Please ensure mop is slightly damp to prevent sealer soaking into the mop.
- 3** Allow to dry then apply a second coat at right angles to the first coat and allow to dry.
- 4** Wait 24 hours for the Rejuvenate to harden then dry buff.

MAINTENANCE AND CARE PRODUCTS

MAINTAIN

is a biodegradable, pH neutral detergent which leaves all surfaces clean and citrus fresh. It is suitable for use on all hard surfaces including walls, floors, benchtops, toilets, and bathrooms.

REJUVENATE

is a metal bonded, water based, high-speed combination floor sealer & finish that provides superior gloss, durability, and dirt release for the demands of high traffic environments. Available in gloss and satin.

REMOVE

contains a unique blend of water-based solvents and biodegradable surfactants. Together, they create a deep, penetrating floor stripper which removes most floor sealers and finishers quickly and efficiently.



TROUBLE SHOOTING

SCUFF MARKS

Scuff marks are caused by friction from foot traffic across the surface of the floor. Light scuff marks can be removed by spot cleaning with Kenbrock Maintain diluted in accordance with the instructions. Heavier scuff marks may require restorative maintenance as per the instructions.

SCRATCHES

Scratches are caused by excessive grit, dirt, or other abrasive particles on the floor. Minor scratching may require restorative maintenance as per the instructions. Any deep scratching or gouges in the planks may result in the individual plank/s needing to be replaced.

GENERAL TIPS

- * Never slide furniture or fittings over an unprotected floor and ensure flooring protectors are used under the feet of furniture and appliances.
- * Be aware that bitumen and rubber can permanently mark your floor, leaving a yellowish stain. This includes rubber used in rubberbacked mats, rubber wheels on trolleys, rubber feet on stools, other furniture and rubber soles on low-cost shoes or slippers. Rubber used on wheelchairs and the like is medical grade rubber and can be used.
- * Keep floor surface clear of dirt, grit, sand and other abrasive materials, which can be walked into your home by use of appropriate entrance matting. Avoid entrance matting that is rubber backed as it can stain your floor.
- * All spillages should be removed immediately with a damp cloth or sponge.
- * DO NOT use any kind of steam or heat mop when cleaning your floors.
- * DO NOT use general household cleaners unless they are specifically for vinyl floors. Avoid using abrasive pads or cleaners, strong alkaline detergents, ammonia, chlorine detergents or any form of bleach.
- * All precautions must be taken to avoid the flooring being exposed to prolonged periods of direct sunlight. As required under Australian Standards, your flooring needs to be protected with the use of blinds or curtains. If this is not practical, use window tints or films which block harmful UV rays.

VIC 17 Cato Street, Hawthorn East VIC 3123

QLD 2 Kingsbury Street, Brendale QLD 4500

PH 1800 674 145

www.kenbrock.com.au

